



Hex Head Streaker®

Light-Gauge Steel Siding to Wood

SCORPION®

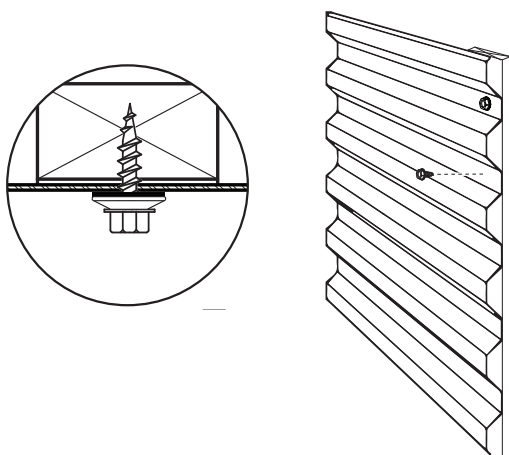

Description Light-gauge steel siding to wood.

Specifications

Size | Gauge: #9

Length: 1 1/2 in. and 2 in.

Head Type: Hex Head

Drive Type: 1/4 in. Hex

Thread Type: Fine

Finish: NanoGard™

Quality Assurance: Scorpion® fasteners are manufactured in ISO 9001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Applications

- Light-gauge steel siding to wood framing
- Light-gauge steel roofing to wood framing

Installation

- Suggested screw gun specification for optimal performance: size #9, up to 4,000 RPM.
- The hex head is fully seated when the EPDM washer is firmly compressed, but not crushed or deformed.
- Minimum penetration should be 6D, or six times the major diameter, in accordance with AWC-NDS for Wood Construction.
- Overdriving may result in failure of the fastener or the EPDM washer.

Features

- Hex head provides maximum driving torque with a flat bearing surface.
- Extra-sharp, 23° Streaker® point is designed to penetrate light-gauge steel quickly and easily.
- Hex washer head design provides for a larger load-bearing surface for better holding power.
- The EPDM washer helps protect against moisture when seated properly.
- NanoGard™ finish is compatible with many types of pressure- and preservative-treated wood applications.


Hex Head Streaker®
Light-Gauge Steel Siding to Wood

SCORPION®

Standard
Corrosion
Test Results

Finish	Test	Standard/Protocol	Results
NanoGard™	Salt Spray	ASTM B117	1,000 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, see the Grabber Guide to Corrosion Resistance for Fasteners.



Product
Dimensions

Screw Gauge	B Head Dia.	Drive Type	D1 Minor Dia.	D2 Major Dia.	TPI ²
#9	0.341 in.	1/4 in. Hex	0.130 in.	0.177 in.	15

²TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Drive Type	Head Dia.	TPI	Quantity	Weight	Special Features
NanoGard™							
TG112	9 x 1 1/2 in.	1/4 in. Hex	0.341 in.	15	2,500	28 lb.	EPDM Washer
TG200	9 x 2 in.	1/4 in. Hex	0.341 in.	15	2,000	30 lb.	

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes. Contact your local Grabber Branch or GrabberPro for more information.

Hex Head Streaker®
PS1079 USA-ENG/Rev. 8-26

Grabber Construction Products, Inc.
3125 W. Executive Pkwy., Suite 200
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks NanoGard, Scorpion, Streaker and Stylized S on Scorpion Fasteners are trademarks of Grabber Construction Products, Inc.

