




Bugle Head Drywall Screw

Gypsum Board to Wood

SCORPION®

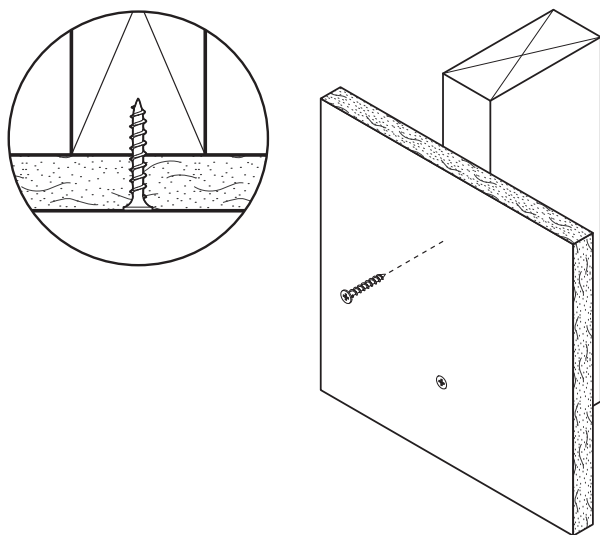

Description Attaches gypsum board to wood.

Specifications

Size | Gauge: #6 to #10
Length: 1 in. to 4 in.
Head Type: Bugle
Recess Type: #2 Phillips
Thread Type: Coarse
Finish: Phosphate, Clear Zinc, Yellow Zinc

Quality Assurance: Scorpion® fasteners are manufactured in ISO 9001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Compliance: The fasteners comply with ASTM C1002 performance requirements.

Applications

- 3/8 in., 1/2 in., and 5/8 in. single-layer gypsum board to wood studs and joists
- 1/2 in. and 5/8 in. double-layer gypsum board to wood studs and joists
- Insulation to wood
- OSB or plywood to wood
- Wood-to-wood applications

Installation

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: sizes #6 to #10, up to 4,000 RPM.
- For gypsum board, the bugle head is fully seated when the screw is below the surface of the wallboard, in accordance with ASTM C1002.
- Overdriving may result in failure of the fastener or failure of the gypsum board.

Features

- A coarse thread screw for attaching drywall to interior wood studs and joists.
- Extra sharp point, designed to penetrate quickly and easily.
- #2 Phillips recess designed for better bit engagement, resulting in less wobble or strip-out.


Bugle Head Drywall Screw
Gypsum Board to Wood

SCORPION®

Standard
Corrosion
Test Results

Finish	Test	Standard/Protocol	Results
Phosphate	Salt Spray	ASTM B117	24 hrs., no red rust
Clear Zinc	Salt Spray	ASTM B117	12 hrs., no red rust
Yellow Zinc	Salt Spray	ASTM B117	24 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.

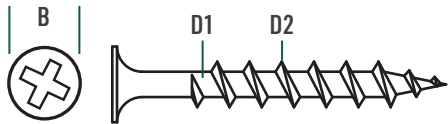

Product
Dimensions

Size	B Head Dia.	Recess	D1 Minor Dia.	D2 Major Dia.	TPI ¹
#6	0.325 in.	#2 Phillips	0.087 in.	0.138 in.	9
#8	0.325 in.	#2 Phillips	0.106 in.	0.164 in.	8
#10	0.354 in.	#2 Phillips	0.126 in.	0.190 in.	8

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Recess	Head Dia.	TPI	Quantity	Weight	Special Features
Phosphate							
HT100	6 x 1 in.	#2 Phillips	0.325 in.	9	10,000	30 lb.	
HT118	6 x 1 1/8 in.	#2 Phillips	0.325 in.	9	10,000	33 lb.	
HT114	6 x 1 1/4 in.	#2 Phillips	0.325 in.	9	8,000	29 lb.	
HT158	6 x 1 5/8 in.	#2 Phillips	0.325 in.	9	5,000	23 lb.	
HT200	6 x 2 in.	#2 Phillips	0.325 in.	9	3,500	19 lb.	
HT214	6 x 2 1/4 in.	#2 Phillips	0.325 in.	9	3,000	19 lb.	
HT212	8 x 2 1/2 in.	#2 Phillips	0.325 in.	8	2,500	24 lb.	
HT300	8 x 3 in.	#2 Phillips	0.325 in.	8	2,000	23 lb.	
HT312	10 x 3 1/2 in.	#2 Phillips	0.354 in.	8	1,000	19 lb.	
HT400	10 x 4 in.	#2 Phillips	0.354 in.	8	1,000	21 lb.	

Bugle Head Drywall Screw

Gypsum Board to Wood

SCORPION®

Ordering Information and Product Options (continued)

Item No.	Size	Recess	Head Dia.	TPI	Quantity	Weight	Special Features
Clear Zinc							
HT114Z	6 x 1 1/4 in.	#2 Phillips	0.325 in.	9	8,000	29 lb.	
HT158Z	6 x 1 5/8 in.	#2 Phillips	0.325 in.	9	5,000	23 lb.	
HT200Z	6 x 2 in.	#2 Phillips	0.325 in.	9	3,500	19 lb.	
HT212Z	8 x 2 1/2 in.	#2 Phillips	0.325 in.	8	2,500	24 lb.	
HT300Z	8 x 3 in.	#2 Phillips	0.325 in.	8	2,000	23 lb.	
Yellow Zinc							
HTYZ114	6 x 1 1/4 in.	#2 Phillips	0.325 in.	9	8,000	29 lb.	
HTYZ158	6 x 1 5/8 in.	#2 Phillips	0.325 in.	9	5,000	23 lb.	
HTYZ200	6 x 2 in.	#2 Phillips	0.325 in.	9	3,500	19 lb.	
HTYZ212	8 x 2 1/2 in.	#2 Phillips	0.325 in.	8	2,500	24 lb.	

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes. Contact your local Grabber Branch or GrabberPro for more information.

Bugle Head Drywall Screw
PS1075 USA-ENG/Rev. 8-26

Grabber Construction Products, Inc.
3125 W. Executive Pkwy., Suite 200
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Scorpion and Stylized S on Scorpion Fasteners are trademarks of Grabber Construction Products, Inc.

