


Trim Board Screw

Wood Trim to Wood

SCORPION®

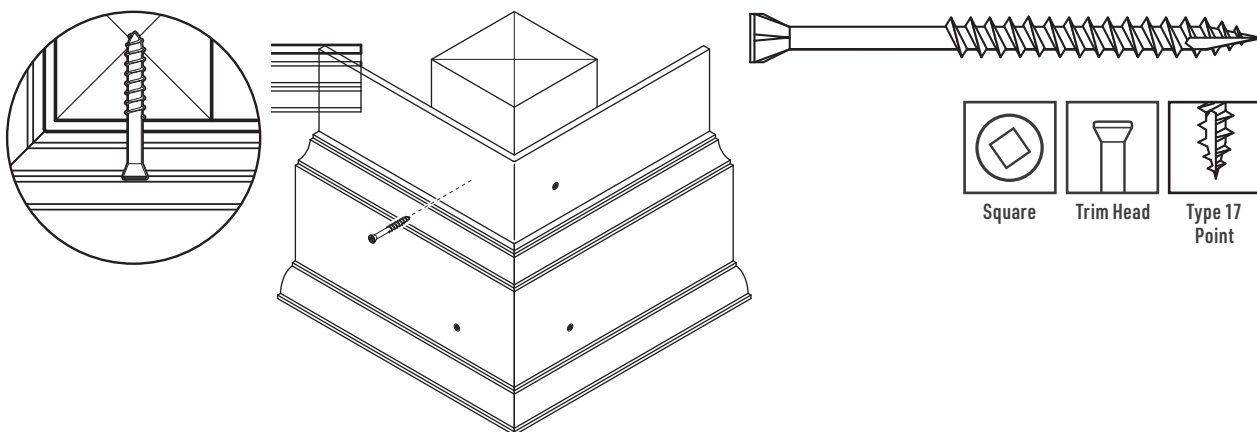

Description Used for attaching wood trim.

Specifications

Size | Gauge: #7
Length: 1 5/8 in. and 2 1/4 in.
Head Type: Trim Head
Recess Type: #1 Square
Thread Type: Coarse
Finish: NanoGard™

Quality Assurance: Scorpion® fasteners are manufactured in ISO 9001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.

Applications

- Wood trim to wood
- Exterior finish applications

Installation

- Use a standard screw gun with a depth-sensitive nose piece, drill or impact driver. Suggested screw gun specification for optimal performance: size #7 up to 4,000 RPM.
- The trim head is fully seated when the head is flush with the work surface.
- The fastener should penetrate the wood at least 6D, or six times the major diameter, in accordance with AWC-NDS for Wood Construction.
- Overdriving may result in failure of the fastener.

Features

- Square recess is a precision recess designed for secure bit engagement in wood-to-wood applications.
- The trim head leaves a less noticeable, finished surface.
- Underhead nibs ensure flush countersinking.
- NanoGard™ finish is compatible with many types of pressure- and preservative-treated wood applications.

Trim Board Screw


Wood Trim to Wood

SCORPION®

Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
NanoGard™	Salt Spray	ASTM B117	1,000 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.



Product Dimensions

Size	B Head Dia.	Recess	D1 Minor Dia.	D2 Major Dia.	TPI ¹
#7	0.246 in.	#1 Square	0.100 in.	0.151 in.	9

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Recess	Head Dia.	TPI ¹	Quantity	Weight	Special Features
NanoGard™							
XTTR158	7 x 1 5/8 in.	#1 Square	0.246 in.	9	5,000	27 lb.	Underhead nibs, Type 17 point
XTTR214	7 x 2 1/4 in.	#1 Square	0.246 in.	9	3,000	22 lb.	

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller package sizes. Contact your local Grabber Branch or GrabberPro for more information.

Trim Board Screw
PS1093 USA-ENG/Rev. 8-26

Grabber Construction Products, Inc.
3125 W. Executive Pkwy., Suite 200
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks NanoGard, Scorpion and Stylized Son Scorpion Fasteners are trademarks of Grabber Construction Products, Inc.

